


Filter Fabric

Trusted Filtration Solutions

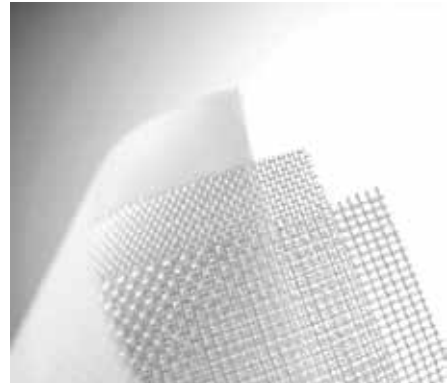

Specifications

Material	PP	NMO	PE
Operating Temp	<90	<130	<130
Max.Temp	<100	<150	<150
Wearness Resistance	Fair	Good	Good
Alkaline Resistance	Excellent	Good	Fair
Acidic Resistance	Excellent	Fair	Good

Applications

- Paints & Ink pre filtration
- Factory water
- Lubricating oil production
- Resin & solvent filtration
- Juice filtration

Material	Micron rating										
Nylon Monofilament (NMO)	37	50	80	100	125	150	200	250	300	400	500
Polyester (PE)	1	5	10	25	50	100	200				
Polypropylene (PP)	1	5	10	25	50	100					

Contact

KETCOTECH (M) SDN. BHD.
 6, Jalan 3/5,
 Bandar Baru Selayang,
 68100 Batu Caves Selangor,
 Malaysia

✉ sales@filter.com.my

☎ +603 - 61363211

🗣 +6012 - 3013211

