



Specifications

Media	: Polyethylene and Polypropylene
End Parts	: Polypropylene
O-ring	: NBR, EPDM, Silicone, FKM (Fluorine Rubber) E-FKM (Encapsulated Fluorine Rubber)

Filtration rate

Nominal	: 1, 3, 5, 10, 25, 50, 75, 100 micron
---------	--

Dimension

Double open ended:
ID x OD x Length
30mm x 62mm x 250, 500, 750, 1000 mm

Single open ended:
ID x OD x Length
25mm x 70mm x 10", 20", 30", 40"

Operating Conditions

Maximum Operating Temperature:
80°C (175°F)
Replacement Differential Pressure:
1.5bar (22psi)
Maximum Differential Pressure:
5.5bar (100psi) @ 20°C (68°F)

CLEAL[®]

GF FILTER Cartridges

Self-Bonding Binder-Free Cartridge Filter

Features

Structure

Only polyolefin thermally bonded bi-component fibers (ES fibers) are used, and the fiber-to-fiber bond forms a stable porosity.

Advantages

- The ES fibers uniquely developed and patented by JNC are used, and the fiber-to-fiber bond at each contact point featuring integral rigid thermally bonded construction enables consistent filtration and eliminates pore size variability and media migration.
- The density graded construction provides long service life.
- The simple but clean and rigid structure utilizing state-of-the-art fiber technology allows for longer service life and higher throughputs.
- A rigid filter structure of fused ES fibers in a three dimensional network with a high tolerance for differential pressure is achieved.
- The diameter of the structural fibers is changed for every grade, and the grades are clearly differentiated from a nominal filtration size of 1µm to 200µm.
- FDA approved materials are used, enabling clean filtration.

Quality

- GF medium Complies with CFR 21 FDA regulations
- Complies with RoHS regulations
- Complies with REACH regulations
- NSF certified elements of DOE type
- Production at ISO 9001 certified factory
- Production at ISO 14001 certified factory

Application

General Industry :

Cleaning water, pre-filter for ultra pure water etc.

Chemicals :


Paint Ink Resins Adhesives Catalysts Solvents Surfactants etc.

Food & Beverages :

Tea, Juices, Wine, Spirits, Soy sauce, Soups, Vinegar, Syrup etc.

Electronics :

Pure water, Optical films, PCB, FPC, Shadow masks, Lead frames, TAB, Electrolyzed copper foils, Ceramic capacitors , Resist etc.

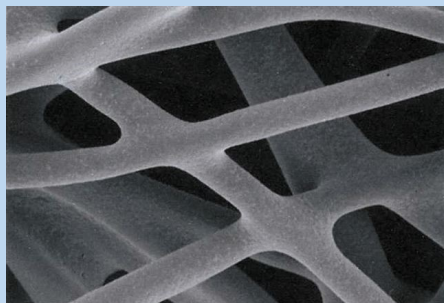


Filter Rating

Grade	Nominal rating	Absolute rating
GF-01	1 μm	15 μm
GF-03	3 μm	20 μm
GF-05	5 μm	30 μm
GF-10	10 μm	40 μm
GF-25	25 μm	50 μm
GF-50	50 μm	70 μm
GF-75	75 μm	90 μm
GF-100	100 μm	100 μm

※ Absolute rating values are only for the reference

Water Permeability


Flow Rate - Differential Pressure

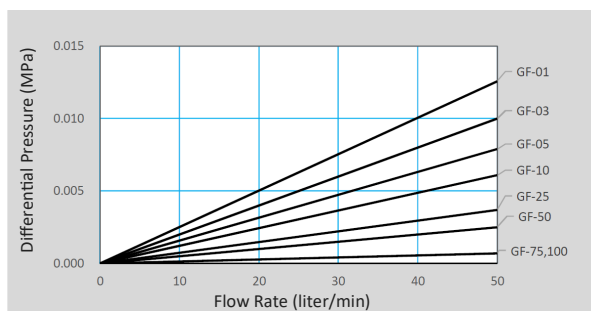

※ per 250 mm, in water

Removal Efficiency

Initial Particle Removal Efficiency

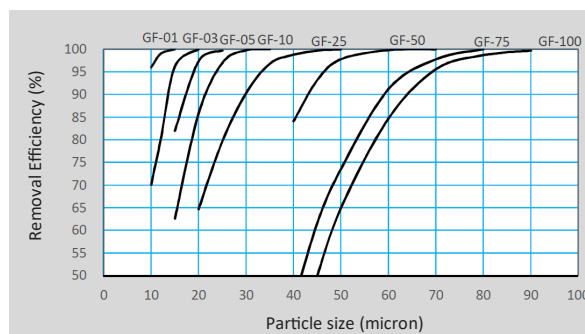

※ tested by JNC method

Ordering Guide

Code information								Sales Unit
Grade	Filter Rating	End Type & Seal Material			ID & OD (mm)	Length (mm)		SPQ (pcs/ctn)
GF -	01 (1 μm)	(DOE) Blank (Blank)			30 - 62 -	250		50
	03 (3 μm)					500		25
	05 (5 μm)					750		25
	10 (10 μm)					1000		25
	25 (25 μm)							
	50 (50 μm)							
	75 (75 μm)	(SOE) E3 (222 O-ring with Flat End) E7 (226 O-ring with Spear End) M3 (222 O-ring with Flat End) M8 (222 O-ring with Spear End)			25 - 70 -	(E3)	282, 532, 777	6
	100 (100 μm)					(E7)	319, 568, 814	6
						(M3)	265, 513, 762	6
							1030	20
			(M8)	319, 568, 814	6			
				1070	20			
Example : GF-10E72 25-70-814 (SPQ 6pcs)								
GF -	10	E7	2	25-70-	814	6		



JNC Filter Co., Ltd.

Headquarters and Osaka Sales Office
Tokyo Sales Office
Nagoya Sales Office
web : <http://www.jnc-corp.co.jp/filter/>

Tel : +81-6-6441-3257 Fax : +81-6-6441-8836
Tel : +81-3-3243-6222 Fax : +81-3-3243-6223
Tel : +81-52-583-6007
Email : jft.exp@jnc-corp.co.jp

3-3-23, Nakanoshima, Kita-ku, Osaka 530-6108
2-2-1, Otemachi, Chiyoda-ku, Tokyo 100-8105
4-4-10, Meieki, Nakamura-ku, Nagoya 450-8561



2018.02.0000