


KETCO PUREGUARD HFC-MC

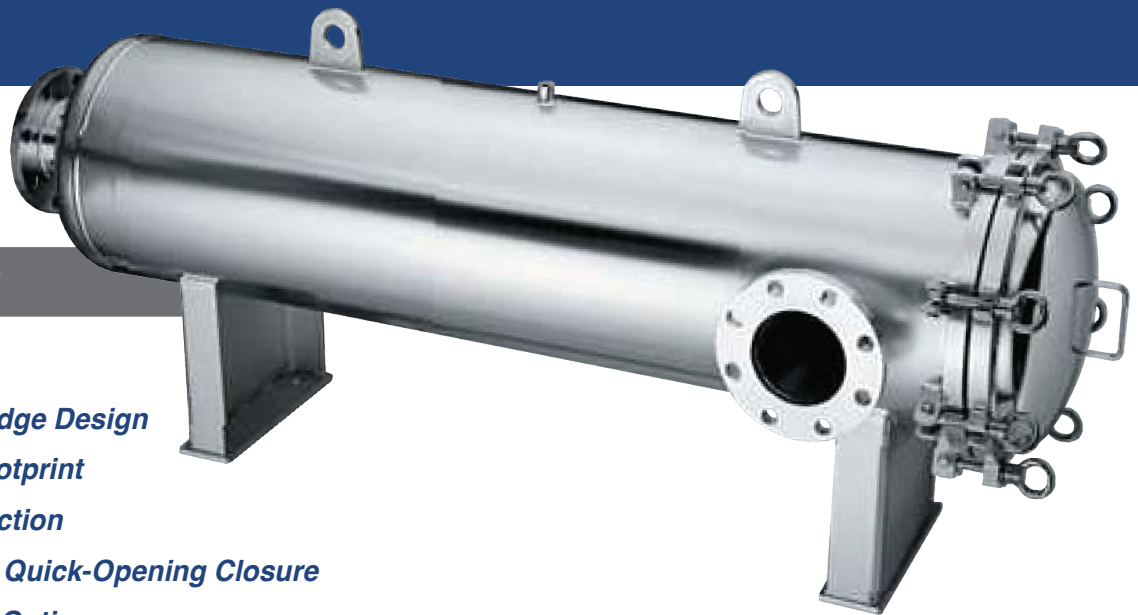

FEATURES

- ▶ *High Flow Capacity*
- ▶ *Efficient Multi-Cartridge Design*
- ▶ *Compact System Footprint*
- ▶ *Heavy-Duty Construction*
- ▶ *Low Pressure Drop ▶ Quick-Opening Closure*
- ▶ *Flexible Connection Options*
- ▶ *Wide Chemical Compatibility*
- ▶ *Suitable for KETCO's Aquastream Ultra filter element*

APPLICATIONS

- ▶ INDUSTRIAL WATER TREATMENT AND POLISHING
- ▶ REVERSE OSMOSIS PRE-FILTRATION IN HIGH-DEMAND SYSTEMS
- ▶ DESALINATION PLANT PRE-TREATMENT
- ▶ COOLING WATER AND PROCESS WATER FILTRATION
- ▶ CHEMICAL AND PETROCHEMICAL PROCESS FLUIDS
- ▶ OIL AND GAS PRODUCTION AND REFINING
- ▶ FOOD AND BEVERAGE HIGH-VOLUME FILTRATION
- ▶ PHARMACEUTICAL AND BIOTECHNOLOGY PROCESSES
- ▶ ELECTRONICS AND SEMICONDUCTOR MANUFACTURING FOR HIGH-PURITY WATER




KETCO PUREGUARD HFC-MC



SPECIFICATIONS

Material	304SS, 316SS, 316L SS
Finishing	Mirror polish, Sand blast
Inlet/Outlet	2", 3", 4" up to 16" Flange
Vent	1/4" NPT (F)
Drain	1/2" NPT (F)
Max. Pressure	150psi

No	Component
1	Screw
2	Top Cover
3	Eye nut
4	Top Cover Flange
5	Shell Flange
6	Washer
7	Eye bolt socket
8	Spindle
9	Eye bolt
10	O-ring
11	Eye nut socket
12	Shell
13	Support leg
14	Bottom cover
15	Lug
16	Inlet/ Outlet
17	Vent
18	Drain

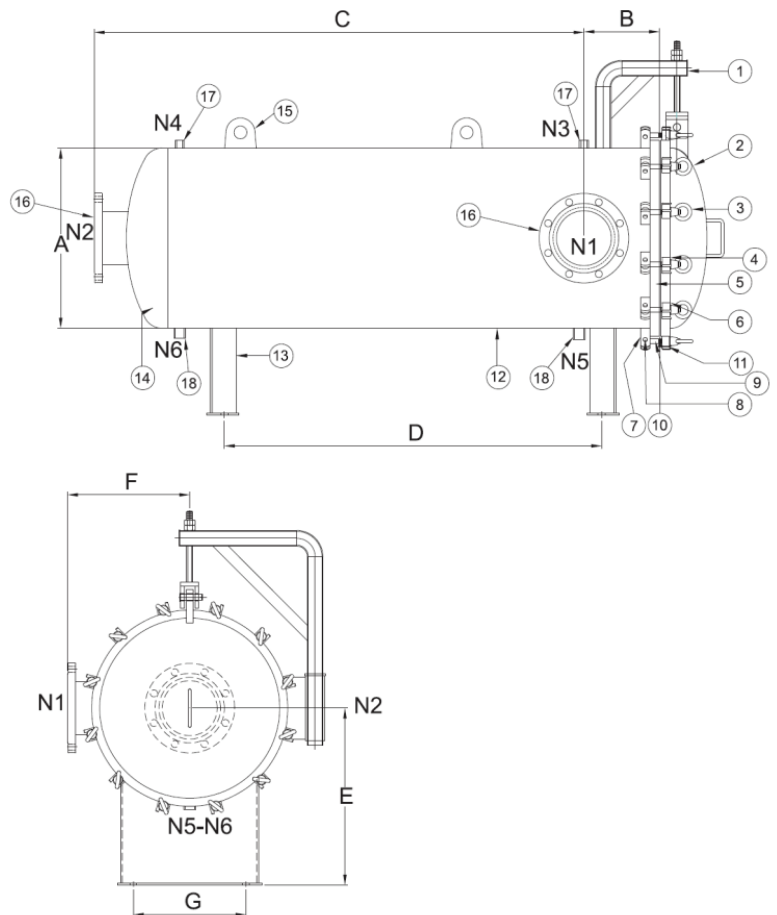

ORDERING GUIDE

PG	HFC-MC	40	3	304	20	E	0
	Cartridge Length	No. of Cartridge Filters	Material	Inlet/ Outlet	Gasket	Connection	
	40 : 40"	2 ~ 19	304 : SUS 304	2" - 16"	E : EPDM	0 = DOE	
	60 : 60"		316 : SUS 316		V : Viton	2 = 222	
			316L : SUS 316L		N : NBR	6 = 226	
					S : Silicone		
					TS: Teflon		
					Encapsulated Silicone		



KETCOTEC (M) SDN. BHD.
6, Jalan 3/5, Bandar Baru Selayang,
68100 Batu Caves Selangor, Malaysia

TRUSTED FILTRATION SOLUTIONS

✉ sales@filter.com.my ☎ +603 6730 9728 📞 +6012 301 3211

