

KETCO PUREGUARD HFC-SC



FEATURES

- ▶ *High Flow Capacity*
- ▶ *Compact Footprint*
- ▶ *Robust Construction*
- ▶ *Low Pressure Drop*
- ▶ *Quick-Opening Closure*
- ▶ *Flexible Connection Options*
- ▶ *Wide Chemical Compatibility*
- ▶ *Suitable for KETCO's Aquastream Ultra filter element*

APPLICATIONS

- ▶ **INDUSTRIAL WATER TREATMENT SYSTEMS**
- ▶ **REVERSE OSMOSIS PRE-FILTRATION**
- ▶ **COOLING WATER FILTRATION**
- ▶ **DESALINATION PLANTS**
- ▶ **CHEMICAL PROCESS FILTRATION**
- ▶ **FOOD AND BEVERAGE PRODUCTION**
- ▶ **PHARMACEUTICAL AND BIOTECH PROCESSES**
- ▶ **OIL AND GAS FILTRATION**
- ▶ **PULP AND PAPER INDUSTRY**
- ▶ **ELECTRONICS AND SEMICONDUCTOR MANUFACTURING**



KETCO PUREGUARD HFC-SC



SPECIFICATIONS

Material 304SS, 316SS, 316L SS


Inlet/Outlet 3/4", 1"

Cartridge Length 40", 60"


Max. Pressure 150psi (10bar)

Model	Cartridges	Dimension (mm)								
		A	B	C	D	E	F	G	H	I
HFC-SC-40	1 No of 40"	Ø232	1349	125	65	1120	176	300	160	200
HFC-SC-60	1 No of 60"	Ø232	1959	125	65	1730	176	300	160	200

No.	Component
1	Vent
2	Handle
3	Top Cover
4	O-ring
5	Shell flange
6	Spindle
7	Eye bolt
8	Washer
9	Eye nut
10	Shell
11	Bottom cover
12	Support Leg
13	Inlet/Outlet
14	Drain

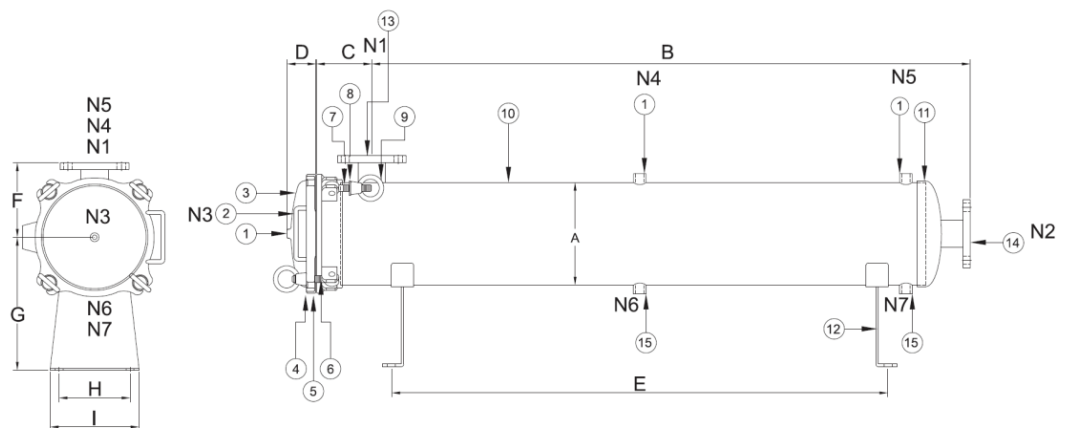

ORDERING GUIDE

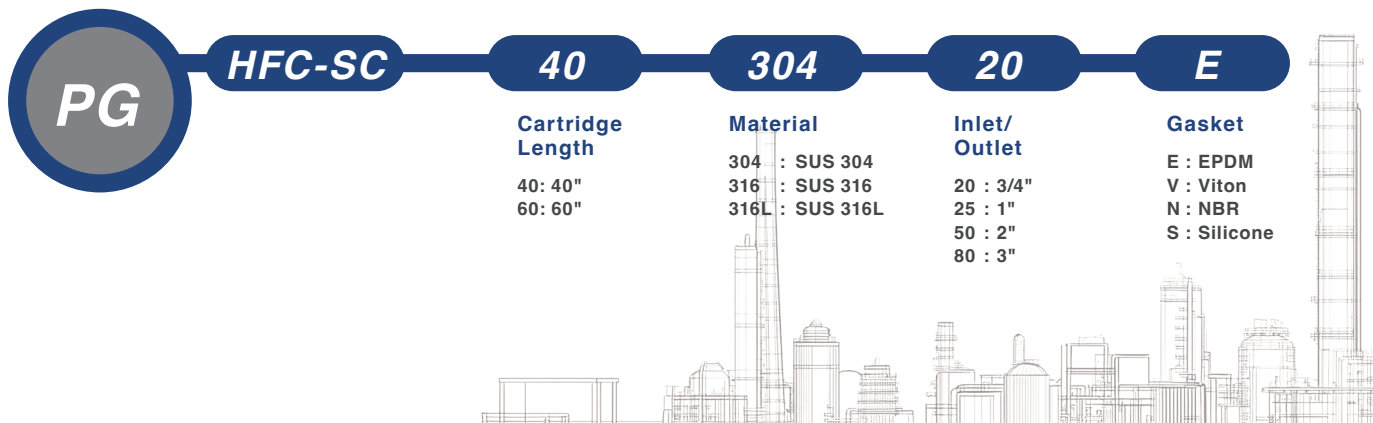

KETCOTEC (M) SDN. BHD.
6, Jalan 3/5, Bandar Baru Selayang,
68100 Batu Caves Selangor, Malaysia

TRUSTED FILTRATION SOLUTIONS

✉ sales@filter.com.my ☎ +603 6730 9728 📞 +6012 301 3211

