

KETCO PUREGUARD MC-VC



FEATURES

- ▶ **Lightweight Construction**
Ideal for applications with moderate pressure and flow requirements.
- ▶ **V-Clamp Closure Design**
Enables quick opening and closing for easy cartridge replacement and reduced maintenance time.
- ▶ **Compact Footprint**
Space-saving design suitable for installations with limited available area.
- ▶ **Multiple Cartridge Configuration**
Accommodates several cartridges for increased filtration capacity and longer service intervals.
- ▶ **Economical Solution**
Cost-effective choice for less demanding industrial and commercial applications.
- ▶ **Corrosion-Resistant Materials**
Manufactured from stainless steel or suitable alloys to ensure durability and chemical compatibility.
- ▶ **Versatile Connection Options**
Available with various inlet/outlet sizes and types for flexible system integration.

APPLICATIONS

- ▶ PAINTS & INK PRE-FILTRATION
- ▶ FACTORY WATER
- ▶ LUBRICATING OIL PRODUCTION
- ▶ RESIN & SOLVENT FILTRATION
- ▶ JUICE FILTRATION




KETCO PUREGUARD MC-VC



SPECIFICATIONS

Material	304SS, 316SS, 316L SS
Finishing	Mirror polish, Sand blast
Inlet/Outlet	1", 2" NPT (F),
Vent	1/4" NPT (F)
Drain	1/2" NPT (F)
Max. Pressure	150psi

No	Component
1	Clamp
2	Vent
3	Top Cover
4	O-ring
5	Shell Flange
6	Shell
7	Inlet
8	Outlet
9	Drain
10	Bottom Cover
11	Support Leg
12	Nut
13	Pressure Plate
14	Springs
15	Cartridge Holding Rod
16	Central Holding Rod
17	Pedestal
18	Nut
19	Cartridge Support Plate

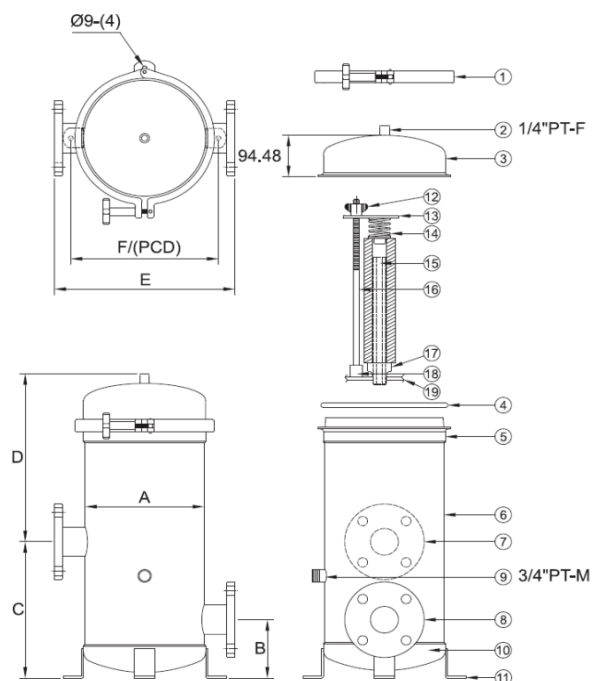

ORDERING GUIDE

PG	MC-VC	10	3	304	20	E	0
		Cartridge Length	No. of Cartridge Filters	Material	Inlet/Outlet	Gasket	Connection
		10 : 10"	3	304 : SUS 304	20 : 3/4"	E : EPDM	0 = DOE
		20 : 20"	5	316 : SUS 316	25 : 1"	V : Viton	2 = 222
		30 : 30"	7	316L : SUS 316L		N : NBR	6 = 226
						S : Silicone	



KETCOTEC (M) SDN. BHD.
6, Jalan 3/5, Bandar Baru Selayang,
68100 Batu Caves Selangor, Malaysia

TRUSTED FILTRATION SOLUTIONS

✉ sales@filter.com.my ☎ +603 6730 9728 📞 +6012 301 3211

