

KETCO PUREGUARD SC-SAN

FEATURES

► **Hygienic Design**

Smooth, crevice-free surfaces minimize bacterial growth and ensure easy cleaning.

► **Tri-Clamp Connections**

Allows quick assembly and disassembly for fast maintenance and reduced downtime.

► **Electropolished Finish**

Enhances corrosion resistance and provides a high-purity surface ideal for sanitary processes.

► **Compact and Versatile**

Suitable for limited space installations while maintaining high performance.

► **Robust Stainless Steel Construction**

Ensures durability and long service life under demanding sanitary conditions.



APPLICATIONS

- RESIN & SOLVENT FILTRATION
- JUICE FILTRATION
- PHARMACEUTICAL PRODUCTS
- COSMETICS PRODUCTS
- PROCESS WATER
- HIGH PURITY CHEMICAL PROCESSING
- RO PRE-FILTRATION
- PHARMACEUTICAL GRADE WATER SYSTEMS



KETCO PUREGUARD SC-SAN




SPECIFICATIONS

Material	304SS, 316SS, 316L SS
Inlet/Outlet	Clamp, NPT, BSP, DIN
Cartridge Length	10", 20" 30"
Bottom Closure Type	V-Clamp
Max. Pressure	100psi (7bar)

Model	Cartridges	Dimension (mm)				
		A	B	C	D	E
PG-SCSAN-10	1 No of 10"	ø 106	77	83	340	207
PG-SCSAN-20	1 No of 20"	ø 106	77	83	590	207
PG-SCSAN-30	1 No of 30"	ø 106	77	83	840	207

No.	Component
1	Clamp
2	Vent
3	Shell
4	Gasket
5	Cartridge Filter
6	Bottom Base
7	Inlet
8	Outlet
9	Support Leg

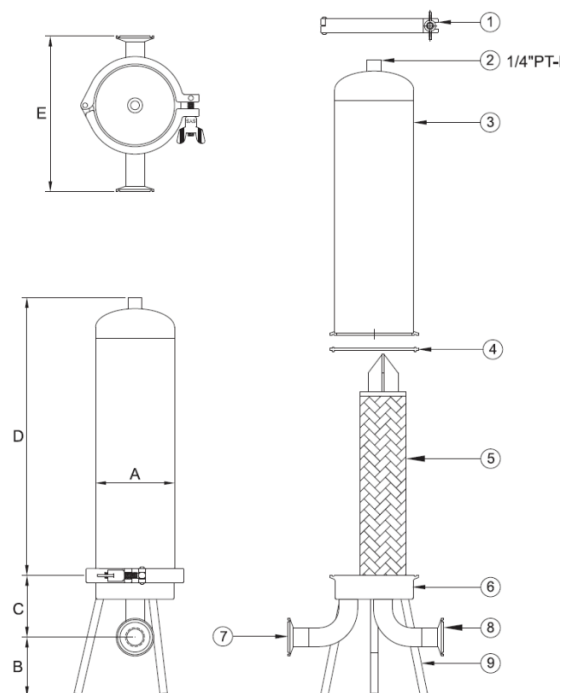

ORDERING GUIDE

PG	SCSAN	10	304	20	E	0
		Cartridge Length	Material	Inlet/Outlet	Gasket	Connection
		10 : 10"	304 : SUS 304	20 : 3/4"	E : EPDM	0 = DOE
		20 : 20"	316 : SUS 316	25 : 1"	V : Viton	2 = 222
		30 : 30"	316L : SUS 316L		N : NBR	6 = 226
					S : Silicone	



KETCOTEC (M) SDN. BHD.
6, Jalan 3/5, Bandar Baru Selayang,
68100 Batu Caves Selangor, Malaysia

TRUSTED FILTRATION SOLUTIONS

✉ sales@filter.com.my ☎ +603 6730 9728 📞 +6012 301 3211

