

KETCO STRAINING GUARD SERIES

FEATURES

- ▶ All basket strainer are custom design to suit different flowrate and different type of liquid.
- ▶ Inlet and outlet sizes and direction can be custom made to suit different requirement.
- ▶ Vent and drain sizes, types can be custom made
- ▶ Available in wide range of mesh sizes to suit different filtration requirements.
- ▶ Engineered for minimal flow resistance even at high flow rates.
- ▶ Large filtration area for high dirt-holding capacity.

APPLICATIONS

- ▶ AUTOMOTIVE FLUID PROCESSING
- ▶ UTILITY WATER
- ▶ WASTE WATER
- ▶ FOOD PROCESSING
- ▶ COOLING WATER SYSTEM
- ▶ LUBRICATING OILS
- ▶ ADHESIVES, RESINS AND INKS



ORDERING GUIDE

SG

IL

304

2

AF

Material


304 : SUS 304
316 : SUS 316
316L : SUS 316L
CS : Carbon Steel
DS : Duplex SS2205

Flange Size

2 = 2"
3 = 3"
4 = 4"
6 = 6"
8 = 8"
10 = 10"
12 = 12"

Connection Type

AF : ANSI Flange
JIS : JIS Flange
DF : DIN Flange
BF : BS Flange
N : NPT

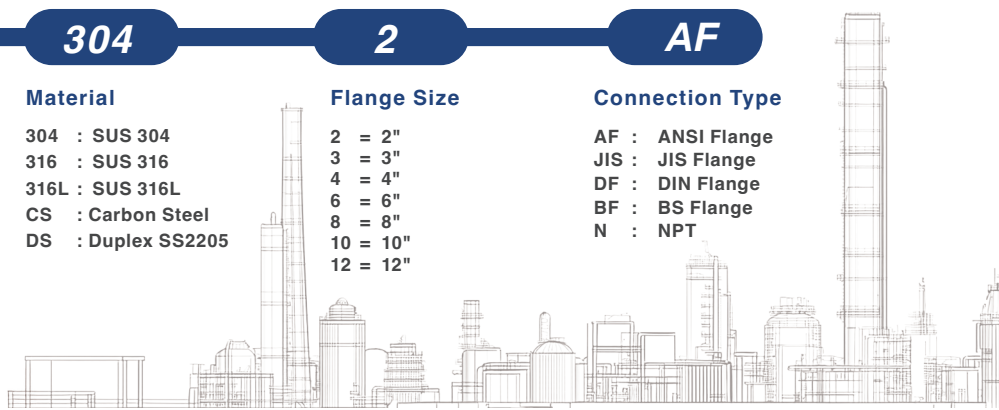


KETCO STRAINGUARD SERIES



SPECIFICATIONS

Material	Carbon steel with inner Epoxy Resin Coated, Stainless steel 304, 316L, Duplex SS2205
Inlet/Outlet	ANSI Flange
Closure	Swing Bolts and Nut
Finishing	Sandblast, Mirror Polished
Sealing	Silicone/Viton O-Ring
Pressure	150psi onwards.
Mesh Size	Up to 400mesh

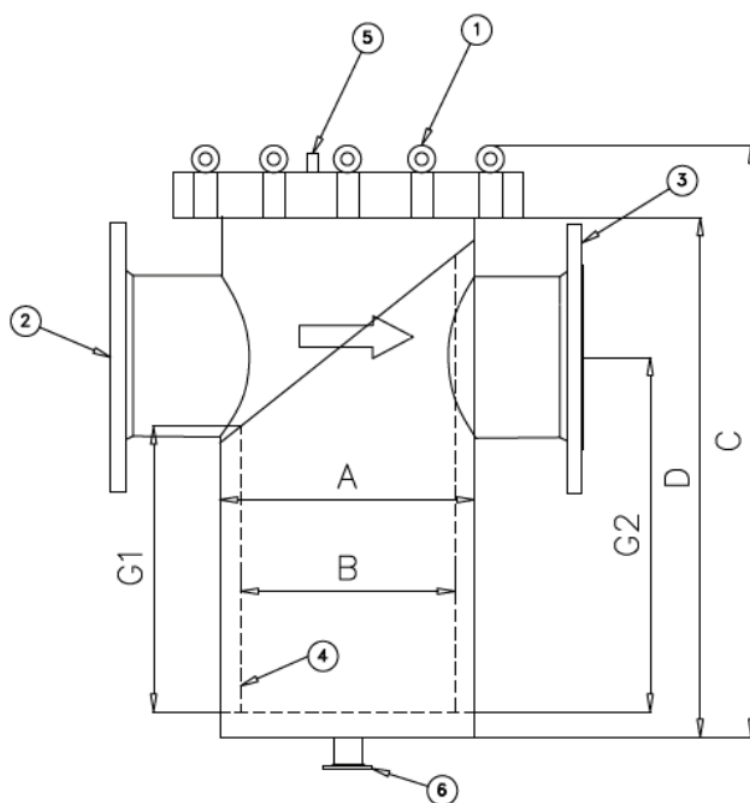

No.	Component
1	Swing bolt and nut
2	Inlet
3	Outlet
4	Strainer
5	Vent
6	Drain



KETCOTEC (M) SDN. BHD.
6, Jalan 3/5, Bandar Baru Selayang,
68100 Batu Caves Selangor, Malaysia

TRUSTED FILTRATION SOLUTIONS

✉ sales@filter.com.my ☎ +603 6730 9728 💬 +6012 3013211

